


**NOTE:**  
 PROVIDE A FULL DEPTH SAWCUT & BUTT JOINT IN CONFORMANCE W/ O.D.O.T. STD. ROADWAY CONSTRUCTION DRAWING BP-3.1. IN ADDITION, (2)-1" DOWEL BARS MUST BE UTILIZED TO CONNECT THE EXISTING & PROPOSED CURB & GUTTER.

**C.L. CURVE DATA**  
 DELTA = 91°3'45"  
 CHORD BEARING = S 04°14'13" W  
 RADIUS = 300.00'  
 LENGTH = 48.32'  
 TANGENT = 24.21'  
 CHORD LENGTH = 48.27'

**NOTE:**  
 THE CURB RAMP BACK TO THE R/W ARE REQUIRED TO BE CONSTRUCTED DURING SITE IMPROVEMENT CONSTRUCTION. IN ADDITION, A 20' SECTION OF SIDEWALK IN EACH DIRECTION FROM THE CURB RAMP OR AS DIRECTED BY THE ENGINEER, WILL BE REQUIRED TO BE CONSTRUCTED WHEN THE CURB RAMP IS CONSTRUCTED.

RCP = O.D.O.T. ITEM 706.02  
 HDPE = O.D.O.T. ITEM 707.33

**REDFIELD LANE 50' (PUBLIC)**

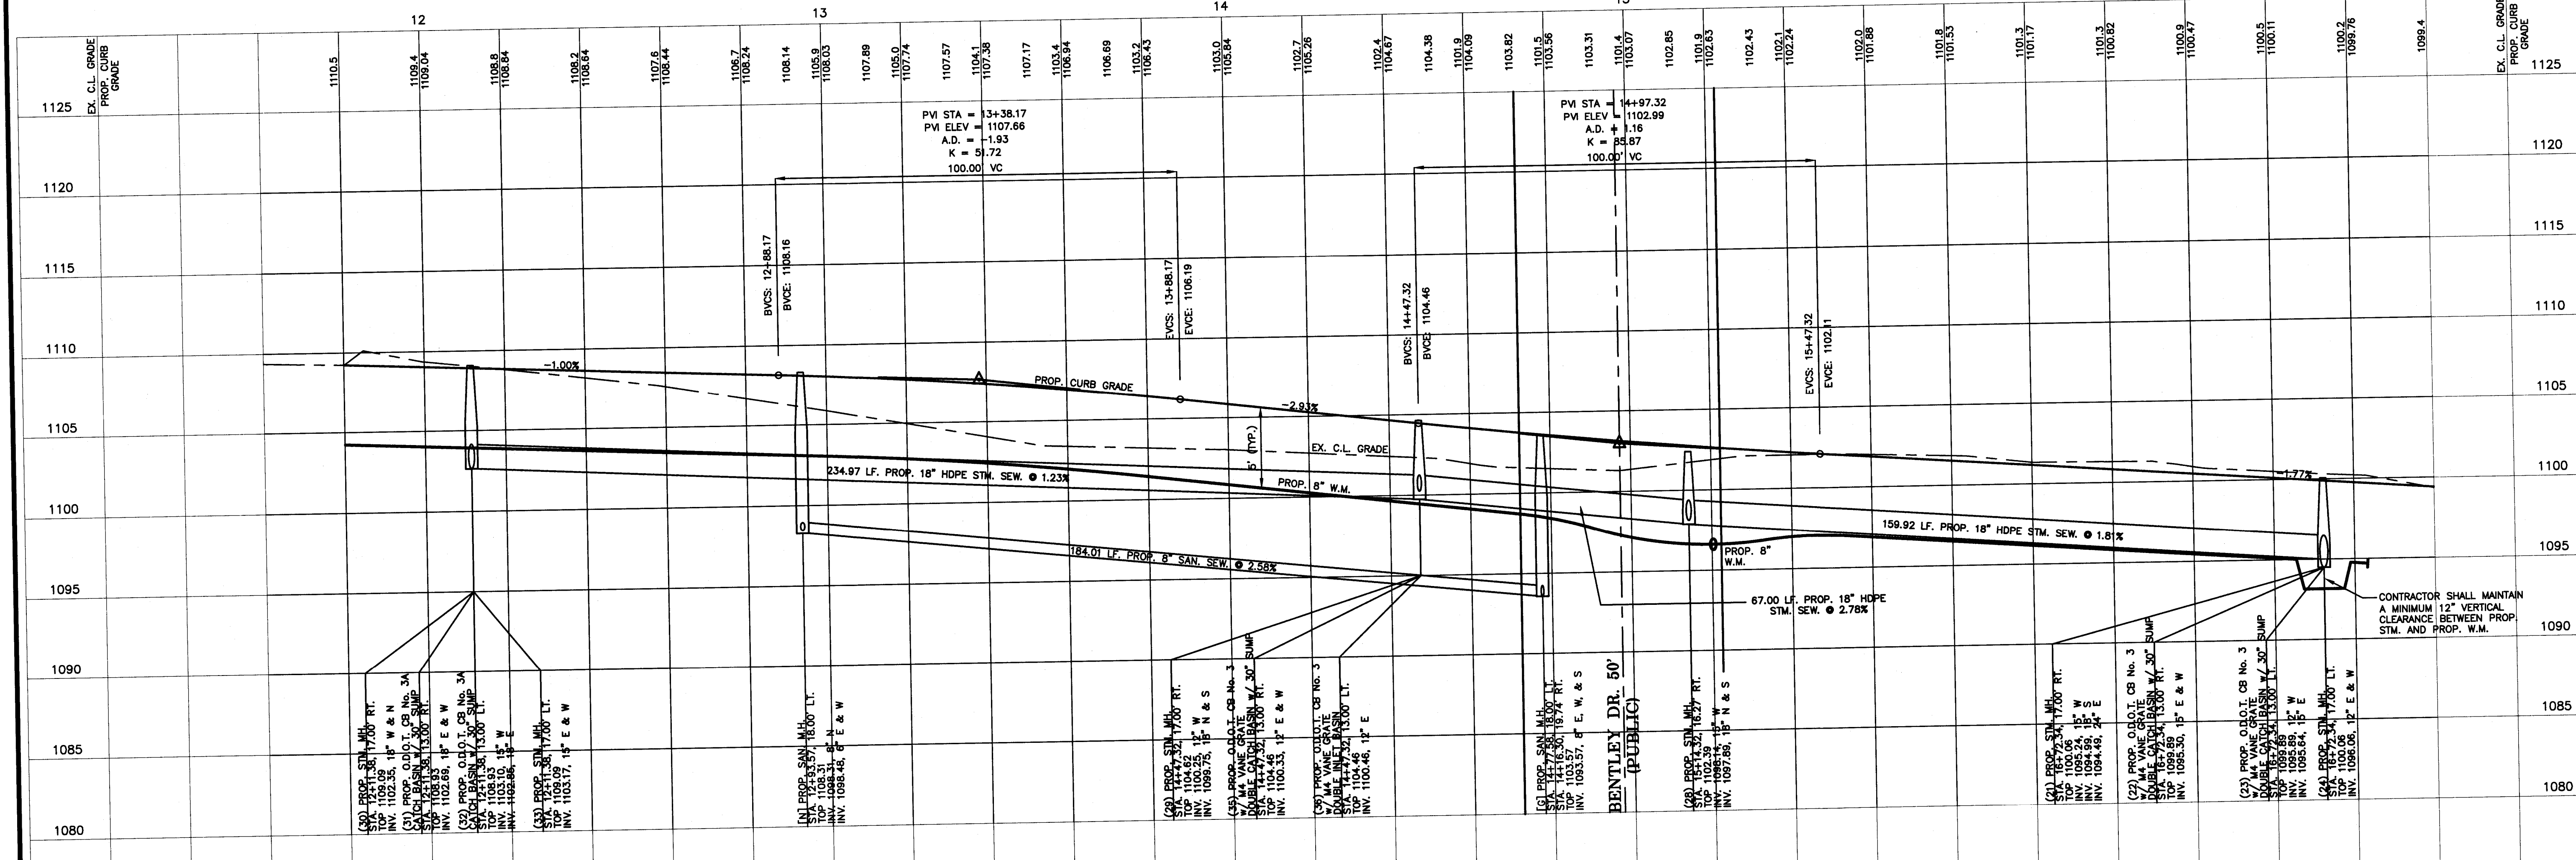

STATION	EX. C.L. GRADE	PROP. CURB GRADE	EX. C.L. GRADE	PROP. CURB GRADE
1125	1110.5	1109.4	1108.8	1108.84
1120	1109.4	1109.04	1108.2	1108.84
1115	1108.8	1108.84	1107.6	1108.44
1110	1108.2	1108.84	1107.6	1108.44
1105	1107.6	1108.44	1106.7	1108.24
1100	1107.0	1108.04	1106.1	1108.04
1095	1106.4	1107.64	1105.5	1107.84
1090	1105.8	1107.24	1104.7	1107.64
1085	1105.2	1106.84	1104.1	1107.44
1080	1104.6	1106.44	1103.5	1107.24

**PULTE HOMES OF OHIO, LLC**  
 387 MEDINA RD., SUITE 1700  
 MEDINA, OH 44256  
 REP.: STAN KATYANIC

**BENTLEY RESERVE**  
 465 S. HAMLETOWN RD.  
 COPLEY TOWNSHIP, OHIO  
 REDFIELD LANE

**GBC DESIGN, INC.**  
 3876 West Main St. Akron, OH 44333-8886  
 Phone 330-886-0228 Fax 330-886-5782

DATE: JAN. 4, 2011  
 PROJECT NO. 36048D  
 DRAWING NO. SD-11